

# IDE FILTER




Galaxy Series IDE Filter is equipped with :

1. Universal standard of union connection
2. Pressure gauge
3. IDE filter element

## Filter Element:

Code	Model	Description	H	I
92201001	IDE36-CE	Filter grid: 7+1 slot span	458	483
92201002	IDE48-CE	Filter grid: 7+1 slot span	610	635
92201003	IDE60-CE	Filter grid: 7+1 slot span	762	787
92201004	IDE72-CE	Filter grid: 7+1 slot span	914	939

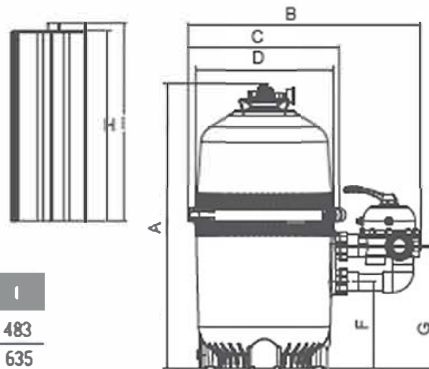

Design Filtration Velocity

**4.9 m<sup>3</sup>/h/m<sup>2</sup>**  
**[2.0 gpm/ft<sup>2</sup>]**

Max Operating Pressure

**3.4 bar [50 psi]**

Max Temperature

**40°C [104°F]**

Valve

**6-Way Multiport Valve**

## Product Information:

Coda	Model	Filter Area		Flow Velocity		Max Flow Rate			Recommended Amount Of O.E		Recommended Amount of Partic		Valve Connection	A	B	C	D	E	E	G
		ft <sup>2</sup>	m <sup>2</sup>	gpm/ft <sup>2</sup>	m <sup>3</sup> /m <sup>2</sup>	gpm	lpm	m <sup>3</sup> /h	lbs	kgs	lbs	kgs								
9220001	IDE36	36	3.3	2.0	4.9	72	269	16.14	4.5	2.0	3.4	1.5	2.0" / 63 mm	886	895	556	504	462	317.5	444.5
9220002	IDE48	48	4.4	2.0	4.9	96	359	21.54	6.0	2.7	4.5	2.0	2.0" / 63 mm	1035	895	556	504	462	317.5	444.5
9220003	IDE60	60	5.5	2.0	4.9	120	448	26.88	7.5	3.4	5.6	2.6	2.0" / 63 mm	1223	895	556	504	462	317.5	444.5
9220004	IDE72	72	6.6	2.0	4.9	144	538	32.28	9.0	4.1	6.8	3.1	2.0" / 63 mm	1362	895	556	504	462	317.5	444.5