

BADU® Classic

Circulation pumps, non-self priming

Connection variant for BADU Classic universal circulation pump.
For whirlpools, bathtub, counter swim units and swimming pool attractions.

Super Classic Serie

Bellow type mechanical seal.
Motor shaft has no contact to water.
Discharge outlet swivel gradually
Pump casing is PPE GF30
Providing maximum safety
Highest Efficiency
As corrosive resistance.




Pool Technology	40	60	74
Inlet/Outlet (in)	4"/4"	4"/4"	4"/4"
Rated Current (A)	10	13	17
Power Input, kw	1.90	3.00	3.45
Power Output, kw	1.60	2.20	3.00
Weight (kg)	18.0	20.0	40.0

All pumps are 3 phase.

Technology data may vary

Description	Flow Rate (m ³ /h)	Voltage	Horse Power
	at 8 meter	3 Phase	(Hp)
BADU Premium 40	40	400/230V	2.5
BADU Premium 60	60	400/230V	4.0
BADU Premium 74	74	400/230V	4.5

Dimension

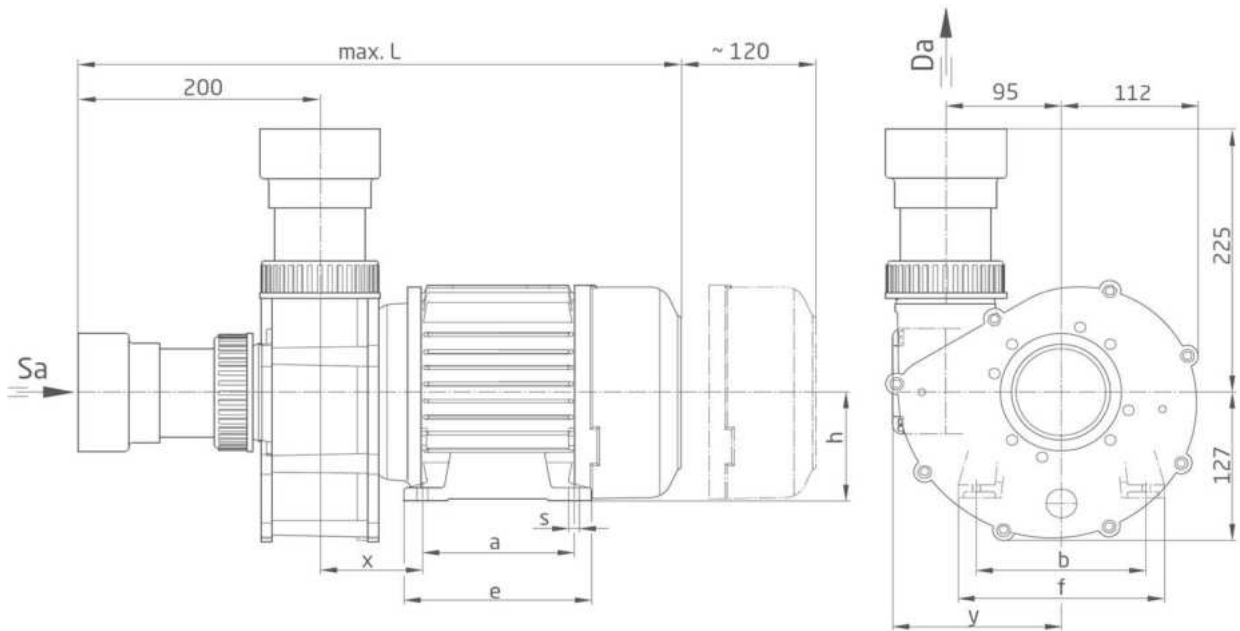

	a	b	e	f	h	s	x	y	L
21-81/31 RG 1~	125	140	155	170	90	9	85	139	498
21-81/31 RG 3~	125	140	155	170	90	9	100	139	522
21-81/32 RG 1~	125	140	155	170	90	9	100	139	513
21-81/32 RG 3~	140	160	176	198	100	12	107	155	547
21-81/33 G 3~	140	160	176	195	100	12	107	155	547
21-81/33 G 1~	140	160	176	195	100	12	107	154	567
21-81/33 G 3~	140	160	176	195	100	12	107	155	547
21-81/34 G 1~	140	160	176	195	100	12	107	155	564

D21.81.001-K

Performance

