

# Sand Filter System **FSF SERIES**

## FSF Filter System

For residential pool

Valve

6-Way Multiport Valve

Max Working Pressure


36psi/2.5bar

Max Water Temperature

43°C (109°F)

Suggested Size Of Media

0.5-0.8mm

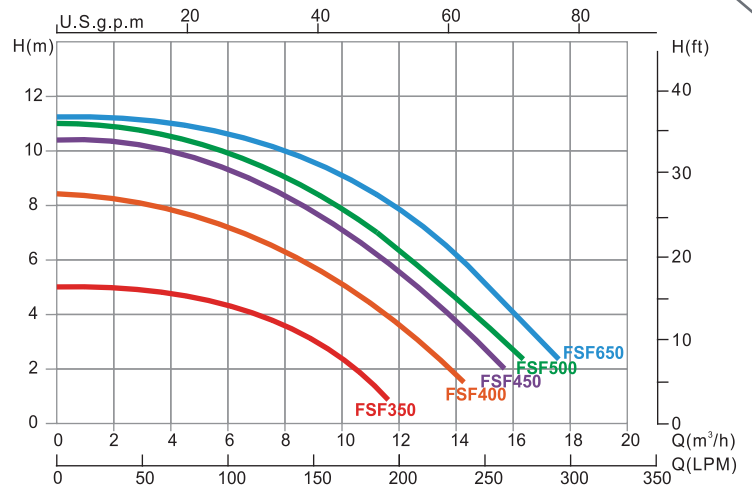

Note: Flow curve information based on 220V/50HZ motor.

## Product Information and Dimensions


Note: Suggested sand weight varies with the differences in filter media size. For reference only.

Code	Model	Filter	Pump	Valve Connections	Sand (kg)	A (mm)	B (mm)	C (mm)	D (mm)	Max. Flow Rate
88032009	FSF350-6W	V350	SS033	1.5" / 50mm	20	160	680	555	355	72lpm 4.32m³/h
88032110	FSF400-6W	V400	SS050	1.5" / 50mm	35	175	759	760	410	108lpm 6.48m³/h
88032211	FSF450-6W	V450	SS075	1.5" / 50mm	45	210	813	760	455	135lpm 8.10m³/h
88032324	FSF500-6W	V500	SC100	1.5" / 50mm	85	235	856	760	535	185lpm 11.10m³/h
88032425	FSF650-6W	V650	SC150	1.5" / 50mm	145	300	961	760	635	260lpm 15.60m³/h

### FSF Series Filtration Combo

includes:

- 1) Top mount fiberglass filter tank
- 2) 6-Way Multiport Valve
- 3) SS or SC Series Pump

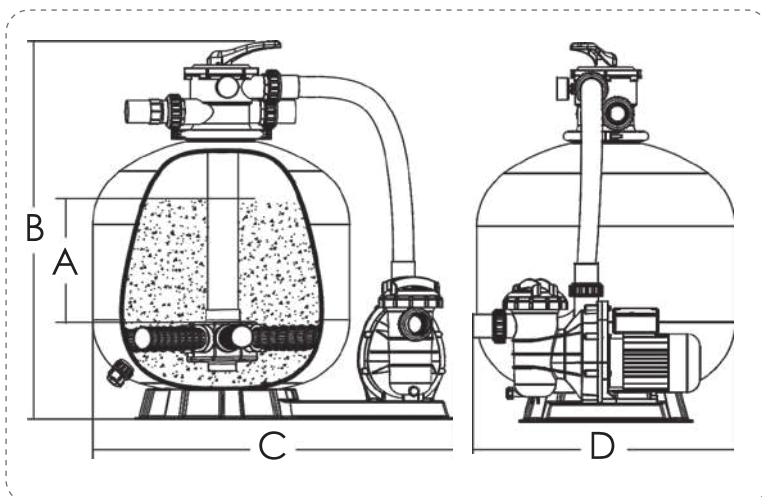

[www.poolandsaunacenter.com](http://www.poolandsaunacenter.com)

[www.motiongroup.co.th](http://www.motiongroup.co.th)