

ปั๊มสะรน้ำกึ่งเชิงพาณิชย์ รุ่น E-Power (EPH)

พร้อมยูเนียน

EPH Series Commercial Pool Pumps
Complete Set With Unions



OLD
VERSION



ปั๊มสะรน้ำประสิทธิภาพสูง

การออกแบบซิลแบบแหวนล็อกช่วยจัดการรั่วไหลของการดูดและเพิ่มประสิทธิภาพการดูดให้สูงสุด

คุณสมบัติ



- อะซิงโครนัส มอเตอร์สองขั้ว
- ฉนวนชั้น: 130(B)
- มาตรฐานกันน้ำ IPX5
- ป้องกันความร้อนในตัว
- การป้องกันการโอเวอร์โหลด
- เฟลลสแตมเลส 316 ซิลกลสแตมเลส
- เชื่อมต่อได้กับทั้งมาตรฐานและเมตริก มาตรฐานการวัดอิมพีเรียลและเมตริก
- Self-Priming ได้สูงถึง 2.5 เมตร เหนือระดับน้ำ
- แรงดันทดสอบ 50 PSI (3.5 Bar)
- ตะกร้าความจุ 5 ลิตร

AN EXCELLENT SELF-PRIMING PUMP

Ring lock seal design eliminate suction leaks and maximize suction efficiency

FEATURES

- Asynchronous, Two Poles
- Class insulation: 130 (B)
- IPX5 Waterproof Standard
- Built-in thermal protection
- Overload protection
- S.S. 316 Shaft & Mechanical Seal
- Special design union compatible for both imperial and metric measurement standard
- Self-Priming up to 2.5 meters above water level
- Testing pressure 50 PSI (3.5 bar)
- Basket volume 5 litres

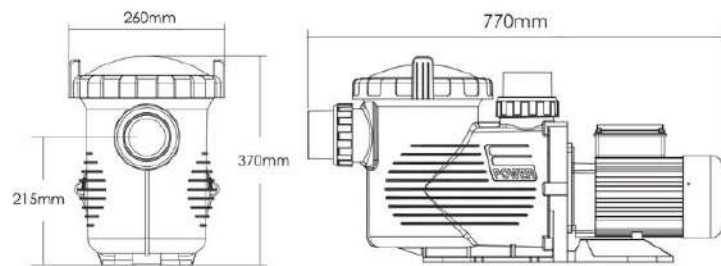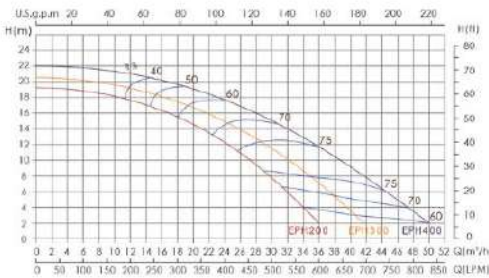

SKU	Model	In/Outlet (inches)	Flowrate (gpm)	Flowrate (m ³ /h)	Head (m)	Noise (dB)	H.P.	V	Ph	KW	Amp	Weight (kg)
2024047061	EPH200-220	2 / 2.5	119	27.04	10	68	2.0	220	1	1.8	6.8	23.0
20700510110	EPH200-380	2 / 2.5	119	27.04	10	68	2.0	380	3	1.8	3.9	23.0
2024047062	EPH300-220	2 / 2.5	141	32.04	10	69	3.0	220	1	2.2	10.0	24.0
20700510115	EPH300-380	2 / 2.5	141	32.04	10	69	3.0	380	3	2.2	5.7	24.0
20700510120	EPH400-380	2 / 2.5	167	37.95	10	71	4.0	380	3	2.8	7.8	25.0